
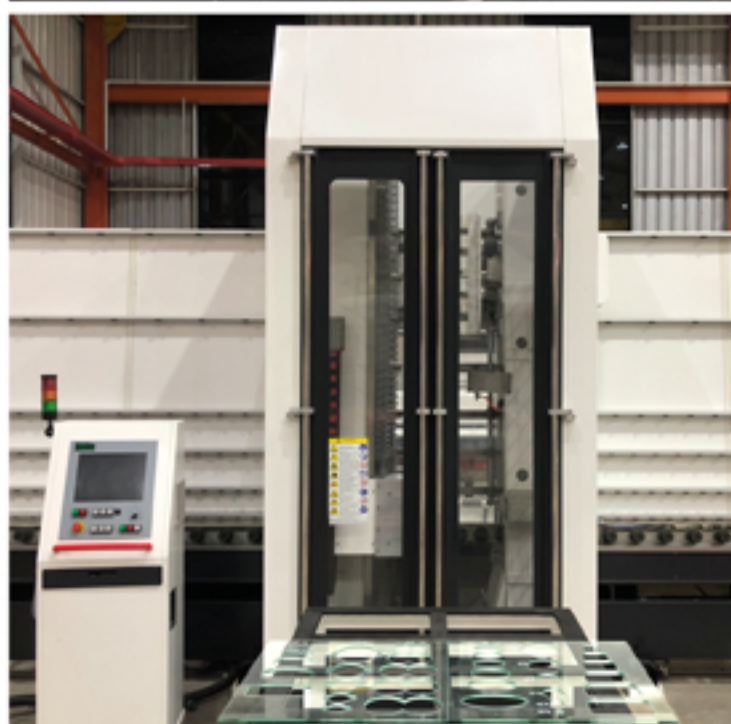


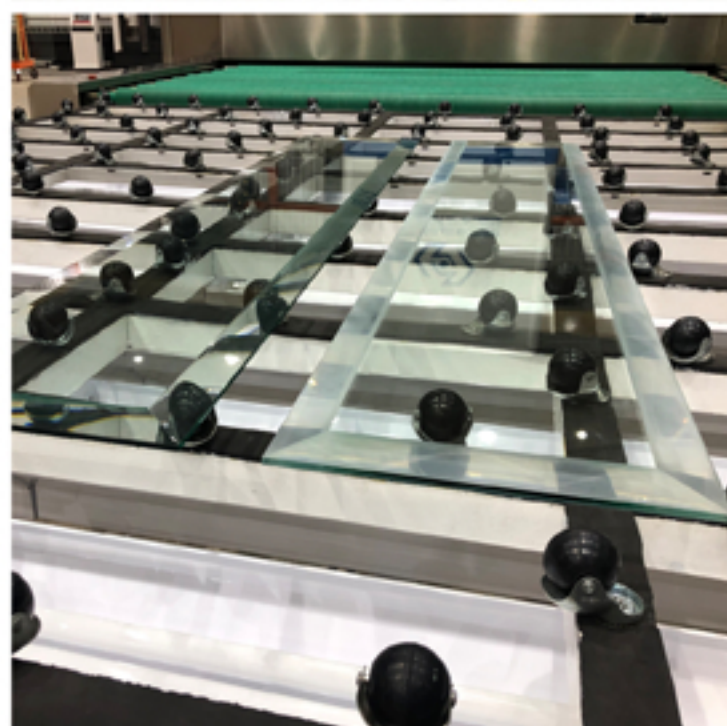

Starting the future,
TODAY.

JL. RAYA CAKUNG CILINCING KM 1
NO. 119, RT/RW 09/03
KELURAHAN CAKUNG TIMUR
KECAMATAN CAKUNG
JAKARTA TIMUR 13910

(+62 21) 690 2728 ; 461 0282
(+62 21) 461 0266

www.muranoglassindo.com
info@muranoglassindo.com



PRODUCT PROFILE

 Murano Glassindo Makmur

 muranoglassindomakmur

 muranoglassmgm



PT. MURANO GLASSINDO MAKMUR is a glass processing factory located across the entrance of toll road in the bustling industrial sector of East Jakarta, Cakung, thus providing a strategic location in establishing a robust and efficient supply chain.

Industry 4.0 ready, our factory has adopted and developed various advanced glass processing methods to cater clients nationwide and worldwide, providing high quality safety glass products.

TEMPERED GLASS	HEAT-STRENGTHENED GLASS	LAMINATED GLASS	BULLETPROOF GLASS	SMART GLASS
FLAT TEMPERED 5 mm - 19 mm Maximum Size 2440 x 5000 mm Minimum Size 300 x 300 mm Emissivity Value Low-E Class 0,01%	FLAT HEAT-STRENGTHENED 5 mm - 19 mm Maximum Size 2440 x 5000 mm Minimum Size 300 x 300 mm Emissivity Value Low-E Class 0,01% Standards : ASTM C-1048 BS.EN.1863	FLAT LAMINATED 5 mm - 19 mm Maximum Size 2500 x 5000 mm Minimum Size 300 x 450 mm Emissivity Value Low-E Class 0,01%	FLAT LAMINATED BALLISTIC-RESISTANT GLAZING (Glass + PVB + SentryGlas + Spallshield) Maximum Size 2500 x 5000 mm Minimum Size 300 x 450 mm Standards : Indoor UL 752 NIJ 0108.01 EN 1063	FLAT LAMINATED (5 + 5 mm Glass + PDLC + EVA) Maximum Size 1800 x 3500 mm Minimum Size 1000 x 1000 mm
CURVED TEMPERED 6 mm - 19 mm +0.2 /-0.0 mm Maximum Size 2440 x 2500 mm Minimum Size 300 x 600 mm 6 mm (R = 1000 mm) 8 mm (R = 1500 mm) 10 mm (R = 1800 mm) 12 mm (R = 2000 mm) 15 - 19 mm (R = 2500 mm)	CURVED ANNEALED 6 mm - 19 mm +0.2 /-0.0 mm Maximum Size 2440 x 2500 mm Minimum Size 300 x 600 mm 6 mm (R = 1000 mm) 8 mm (R = 1500 mm) 10 mm (R = 1800 mm) 12 mm (R = 2000 mm) 15 - 19 mm (R = 2500 mm) Standards : ASTM C-1048 BS.EN.1863	FLAT LAMINATED TEMPERED 5 mm - 19 mm Maximum Size 2500 x 5000 mm Minimum Size 300 x 450 mm Emissivity Value Low-E Class 0,01% PVB FILMS : • Kuraray • KB (kingboard) - #1 di China • SEKISUI (S-Lec) - #1 di Jepang and of the best in the world.		